



2PM-22 Series 4Pin Docking Male Panel Socket with Cable Shell - 2PMT22БПН4Ш3В1В

Part Number:

2PM22J4ZQB2

Compatible Part Numbers

Russian P/N	2PMT22БПН4Ш3В1В
English P/N	2RMT22BPN4SH3V1V
RENHOTEC P/N	2PM22J4ZQB2

Basic Information

Connector Type	Receptacle
Orientation	Straight
Gender	Male
Shell Size	2PM 22
Number of Positions	4 Pin
Combination No.	3

Mechanical Specification

Contact Termination	Solder
Fastening Type	Threaded
Contact Size	Φ2.0+Φ3.0
Durability	500 Cycles

Material Specification

Shell Material	Aluminum Alloy
Contact Material	Brass
Contact Finish	Silver
Insulation Material	Bakelite / Fiberglass / PBT


Electrical Specification

Shielding	Unshielded
Rated Current	Φ2.0(20A) Φ3.0(30A)
Rated Voltage	≤700V (AC)
Insulation Resistance	Normal ≥1000MΩ Moistheat ≥20MΩ
Contact Resistance	0.8-5MΩ


Environmental Specification

Operating Temperature	-60℃+300℃
-----------------------	-----------

Contact Layout



Size

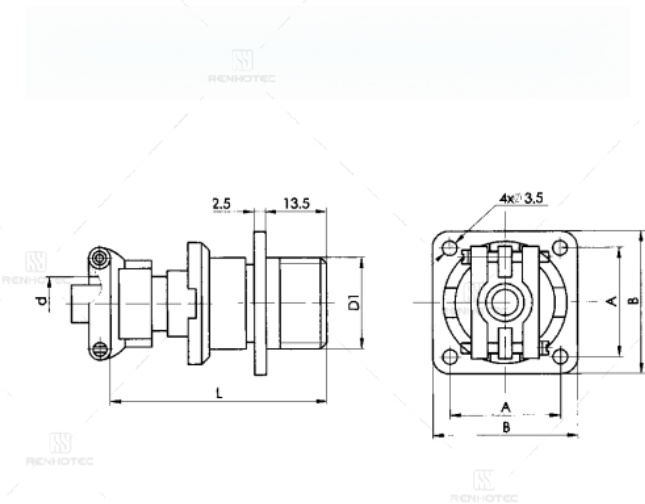

Size (mm)					
Shell Size	D1	d	A	B	L
14	M16×1	6.5	17±0.1	24	54
18	M20×1	10.5	20±0.1	27	54
22	M24×1	14.5	23±0.1	30	57
24	M27×1.5	16.5	26±0.1	33	62.5
27	M30×1.5	18.5	29±0.1	36	62.5
30	M33×1.5	20.5	31±0.1	38	62.5
33	M36×1.5	22.5	32±0.1	40	67.5
36	M39×1.5	22.5	35±0.1	43	67.5
39	M42×1.5	24.5	37±0.1	46	67.5
42	M45×1.5	30.5	40±0.1	49	67.5
45	M48×1.5	30.5	43±0.1	52	67.5

How to Order

Series:

- 2PM Unsealed
- 2PM-(M Sealed)
- 2PM-(C Sealed bulkhead)

Shell Size:

14.18.22.24.27.30.33.36.39.42.45

Gender:

K(Female) / J(Male)

Contacts:

4.7.8.10.19.20.22.24.30.32.42.45.50

2PM 18 K 4 Q B 2 (5)

Combination No. of contacts: 1.2.3.4.5.6.7.8.9

Plating of contacts:

1 - Gold plated pin 2 - Silver plated pin

Connector type:

- Q: Straight cable plug W: Angled cable plug
- Z: Unsealed socket M: Sealed socket C: Sealed socket bulkhead

Shielded or not of Tail attachment:

A(Shielded) B(Unshielded)

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.