



2PM-33 Series 32Pin Male Panel Socket with Gold-Plated Pin - 2PMΔT33B32Ш1A1B

Part Number:

2PM33J32Z1

Compatible Part Numbers

Russian P/N	2PMΔT33B32Ш1A1B
English P/N	2RMDT33B32SH1A1V
RENHOTEC P/N	2PM33J32Z1

Basic Information

Connector Type	Receptacle
Orientation	Straight
Gender	Male
Shell Size	2PM 33
Number of Positions	32 Pin
Combination No.	5

Mechanical Specification

Contact Termination	Solder
Fastening Type	Threaded
Contact Size	Φ1.5
Durability	500 Cycles

Material Specification

Shell Material	Aluminum Alloy
Contact Material	Brass
Contact Finish	Gold
Insulation Material	Bakelite / Fiberglass / PBT


Electrical Specification

Rated Current	10A
Rated Voltage	≤700V (AC)
Insulation Resistance	Normal ≥1000MΩ Moistheat ≥20MΩ
Contact Resistance	0.8-5MΩ


Environmental Specification

Operating Temperature	-60℃~+300℃
-----------------------	------------

Contact Layout



Size

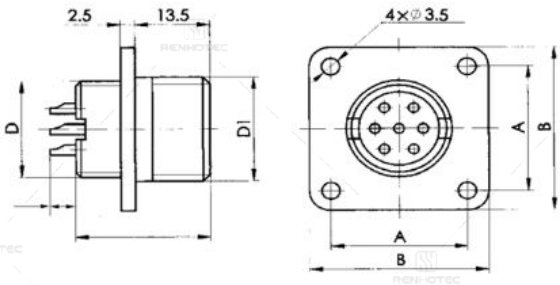

Shell Size	D(Left)	D ₁	A	B	B
14	M14×1	M16×1	17±0.1	24	24
18	M18×1	M20×1	20±0.1	27	
22	M22×1	M24×1	23±0.1	30	
24	M24×1	M27×1.5	26±0.1	33	
27	M27×1	M30×1.5	29±0.1	36	
30	M30×1	M33×1.5	31±0.1	38	
33	M33×1	M36×1.5	32±0.1	40	
36	M36×1	M39×1.5	35±0.1	43	
39	M39×1	M42×1.5	37±0.1	46	
42	M42×1	M45×1.5	40±0.1	49	
45	M45×1	M48×1.5	43±0.1	52	26

How to Order

Series:

- 2PM **Unsealed**
- 2PM-(M **Sealed**)
- 2PM-(C **Sealed bulkhead**)

Shell Size:

14.18.22.24.27.30.33.36.39.42.45

Gender:

K(Female) / **J**(Male)

Contacts:

4.7.8.10.19.20.22.24.30.32.42.45.50

2PM 18 K 4 Q B 2 (5)

Combination No. of contacts: 1.2.3.4.5.6.7.8.9

Plating of contacts:

1 - Gold plated pin **2** - Silver plated pin

Connector type:

- Q**: Straight cable plug **W**: Angled cable plug
- Z**: Unsealed socket **M**: Sealed socket **C**: Sealed socket bulkhead

Shielded or not of Tail attachment:

A(Shielded) **B**(Unshielded)

Disclaimer

The information in this specification is subject to change without notice. Please confirm the latest version before use. Technical parameters are for reference only, and sufficient testing and verification should be conducted in actual applications.